
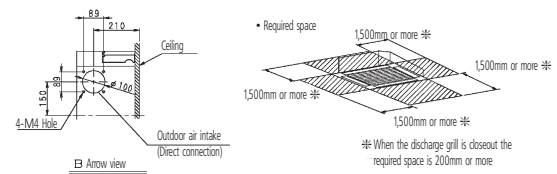


• Decoration panel
 BYFG06B7W1 White Ral: 9010



Nr.	Name	Description
1	Liquid pipe connection	ø 6.4 Flare connection
2	Gas pipe connection	ø 12.7 Flare connection
3	Drain pipe connection	VP25 (O.D. ø 32)
4	Wire intake	
5	Interunit wiring connection	
6	Grounding terminal	Inside switch box (M4)
7	Discharge	
8	Air suction grille	
9	Long life filter	
10	Suspension bolt	

NOTES

- Location of manufacturer's label
 Indoor unit: on the bell mouth, inside suction panel
 Decoration panel: on the inner frame, inside suction grille
- When using an infrared remote control, this position will be a signal receiver. Refer to the drawing of the infrared remote control for more details
- When the temperature and humidity in the ceiling exceed 30°C and RH is 80 %, or the fresh air is inducted into the ceiling, or the unit continues 24 hour operation, an additional insulation is required (thickness 10mm or more or glass wool or polyethylene foam)
- Though the installation is acceptable up to maximum 660mm square ceiling opening, keep the clearance of 45mm or less between the main unit and the ceiling opening so that the panel overlap allowance can be ensured.